

PACKING LIST



Body



Manual



Spanner
(7 mm)



Hex wrench
(2/2.5/4 mm)




Oil Seal



Bag



Shoulder Strap

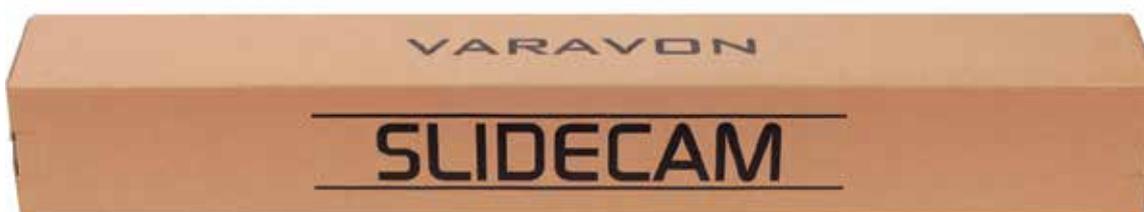

COMPANY & INFORMATION

811 Mechazone
2979 Hagun-ri Yangchon-eup
Gimpo-si Gyeonggi-do S.KOREA
TEL: 82-708-630-6464 / FAX: 82-2-6008-0820

www.VARAVON.com

e-mail: varavon@naver.com

MADE IN KOREA

SLIDECAM **V**



- Manual -



SETTING & ASSEMBLING



Slim & Light Slider



Easy Mount Dial



Adjusting Brake
(Stop Bar)



Folding Leg

SETTING & ASSEMBLING




SLIDER APPLICATION

Function of the Hole 1/4 inch, 3/8 inch



MODEL & SPECIFICATION

**Slidecam V of various sizes.
Body of Aluminum Alloy**

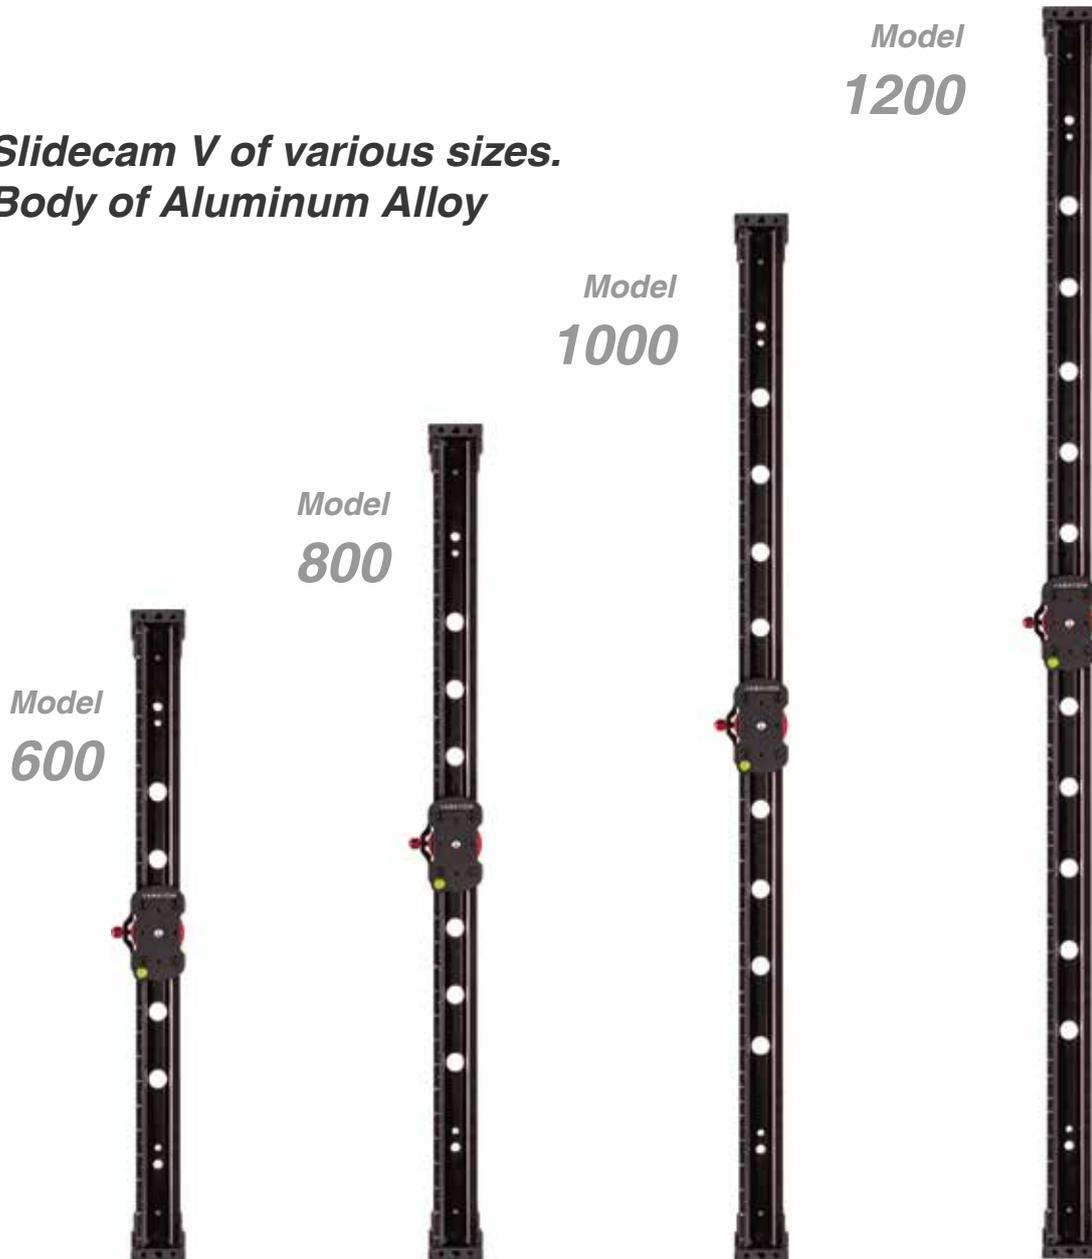

mm	600	800	1000	1200
inch	23	31	39	47
ft	1.9	2.6	3.2	3.9
Weight(kg)	1.5	1.8	1.9	2.2
Width (mm/inch)	45 / 1.7			
Max Load (kg/lb)	20 / 44			
Material	Aluminum Alloy / Steel			

APPLY DIVERSE CAMERAS



More stable and perfect sliding



JVC HM100



Canon 5D Mark III




Sony DSC-P150




Canon C300

TENSION TUNING

NOTE

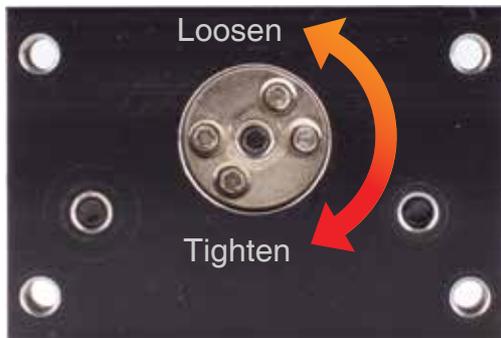

Spanner
(7mm)

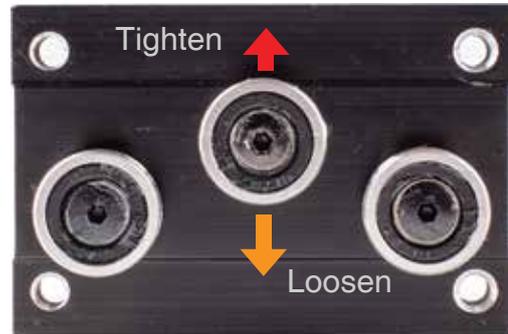

Hex wrench
(2.5mm)



* Very precise work is needed for tension adjustment.

STEP 01



Use wrench to loosen 4 bolts on the block.
(Using hex wrench 4mm)



Remove the block cover.

STEP 02



After removing the dial knob.




Bottom of the slider bearing is placed in
the hole to appear. (The center of the bearing)

TENSION TUNING



Use the hex wrench to unlock bearings.
(Using hex wrench 2.5mm)

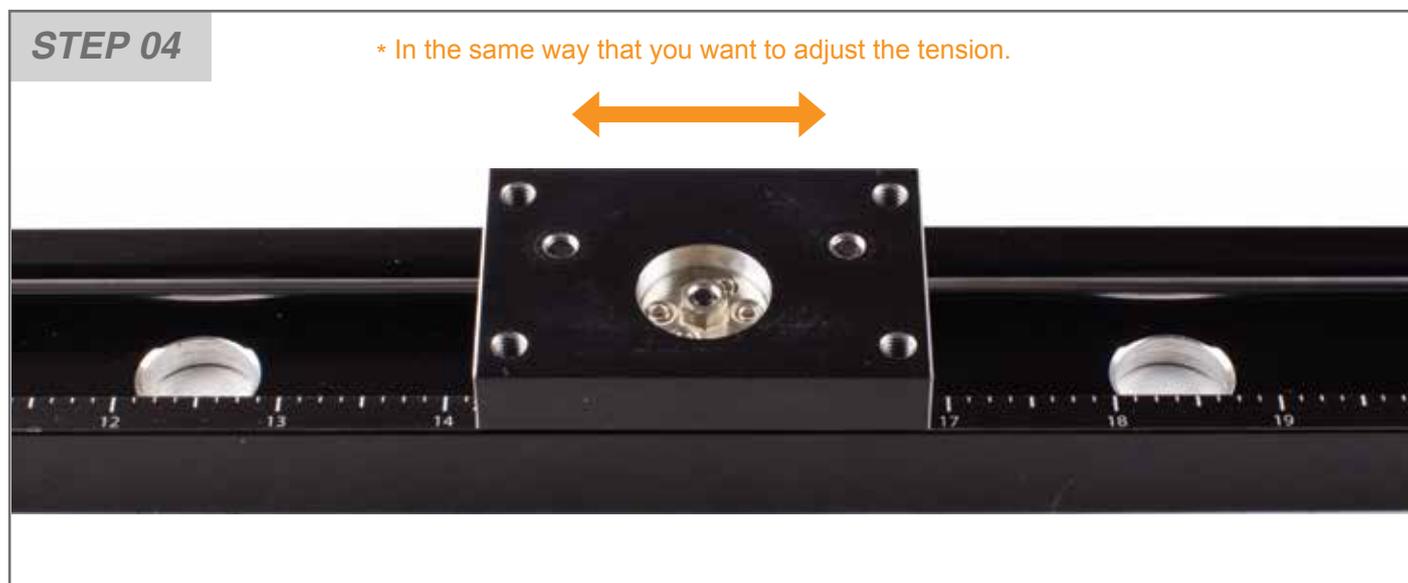

Check the tension by moving from side to side.



Dial knob placed on the block.



And 4 bolt mounting block cover.
(Using hex wrench 4mm)